

# **Network Terminal Installation, Operation, and Maintenance Instructions**

**8040375G001**  
**Rev. 100 (11/2001)**

The information in this document is believed to be accurate and reliable. However, Helix Technology Corporation, cannot accept any financial or other responsibilities that may result from the use of this information. No warranties are granted or extended by this document.

Helix Technology Corporation reserves the right to change any or all information contained herein without prior written notice. Revisions may be issued at the time of such changes and/or deletions.

Any duplication of this manual or any of its parts without expressed written permission from Helix Technology Corporation is strictly prohibited.

Any correspondence regarding this document should be forwarded to:

Helix Technology Corporation  
Mansfield Corporate Center  
Nine Hampshire Street  
Mansfield, Massachusetts 02048-9171 U.S.A.

Telephone: (508) 337-5000  
FAX: (508) 337-5464

The following Helix Technology Corporation trademarks and service marks may appear in this document:

Conductron™	Convectron®	Cryodyne®	Cryogen®
Cryogenerator®	Cryo-Torr®	CTI-Cryogenics®	FastRegen™
GOLDLink®	Granville-Phillips™	GUTS®	Helix Technology.. Your Vacuum Connection <sup>SM</sup>
Helix®	Micro-Ion®	Mini-Ion™	On-Board®
RetroEase®	RetroFast®	Stabil-1®	Stabil-Ion®
ThinLine™	TurboPlus®	Vacuum Assurance <sup>SM</sup>	

All other trademarks or registered trademarks are the property of their respective holders.

# Software License Agreement

This software license agreement (“Agreement”) grants you the right to use the software contained in this product (the “Software”) subject to the following restrictions. You may not (i) copy the Software, except for archive purposes consistent with your standard archive procedures; (ii) transfer the Software to a third party apart from the entire product; (iii) modify, decompile, disassemble, reverse engineer, or otherwise attempt to derive the source code of the Software; (iv) export the Software or underlying technology in contravention of applicable U.S. and foreign export laws and regulations; and (v) use the Software other than in connection with the operation of this product.

# Table of Contents

## Section 1 - Introduction

General .....	1-1
On-Board NetLink Option .....	1-1
Specifications .....	1-3
Front Panel Component Description .....	1-6
Keypad/Display Control Description .....	1-6
Alphanumeric Display .....	1-6
Horizontal Scroll Display Keys .....	1-6
Vertical Scroll Display Keys (Last, Next) .....	1-6
Clear Display Key .....	1-7
Numeric Keypad .....	1-7
Enter Command Key .....	1-7
Function Keys .....	1-7
Service RS-232 Port .....	1-7
Rear Panel Component Description .....	1-7
ON/OFF Switch - Input Power Connector .....	1-7
Bonding Stud .....	1-7
LED Indicator .....	1-8
Network Connectors .....	1-8
Address Switch .....	1-8
AUX RS-232 Port .....	1-8
Host RS-232 Port .....	1-8
Pumps 00 - 09 Port .....	1-8
Pumps 10 - 19 Port .....	1-8

## Section 2 - Inspection

General .....	2-1
Shipping Carton Contents .....	2-1

## Section 3 - Installation

Network Configurations .....	3-1
Power Connections .....	3-3
110/120 VAC .....	3-3
220/240 VAC .....	3-4

## Section 4 - Operation

Addressing a Pump .....	4-1
Roughing Maps .....	4-2
Rough Valve Map Example Procedure .....	4-3
Summary .....	4-3

## Table of Contents (continued)

Establishing Roughing Maps and Password Protection ..... 4-4

Full Rough Coordination Functionality ..... 4-5

    Turning On the Full Rough Coordination Feature ..... 4-5

Power Fail Coordination Functionality ..... 4-6

    Turning ON the Power Fail Coordination Feature ..... 4-6

Regeneration Groups ..... 4-6

    Setting up Regeneration Groups with the Network Terminal ..... 4-7

    Starting a Group Regeneration From the Network Terminal ..... 4-8

The RS-232 Communication Ports ..... 4-8

    Setting the RS-232 Port Baud Rates ..... 4-9

### Section 5 - Maintenance

Memory Backup Battery ..... 5-1

    Symptoms ..... 5-1

    Battery Voltage Test ..... 5-1

Memory Backup Battery Replacement ..... 5-2

### Section 6 - Troubleshooting

If You Have Problems Starting A Group FastRegen ..... 6-1

If You Cannot Communicate With A Pump ..... 6-1

Network Terminal Failure Messages ..... 6-2

### Appendix A - Customer Support Information

### Appendix B - Network Terminal RS-232 Interface Protocol Format

## Table of Contents (continued)

### Figures

Figure 1-1: Network Terminal Configurations .....	1-2
Figure 1-2: Half Panel Dimensions .....	1-4
Figure 1-3: Network Terminal Right Hand Configuration .....	1-5
Figure 1-4: On-Board Keypad/Display .....	1-6
Figure 1-5: Example of Daisy Chained Pump Configuration .....	1-9
Figure 3-1: Example of Daisy Chained Pump Configuration .....	3-2
Figure 3-2: Network Selector Switch Location .....	3-3
Figure 3-3: Input Power Connector 220/240 VAC Modification .....	3-4
Figure 4-1: Network Terminal Keypad/Display .....	4-1
Figure 4-2: Rough Valve Map Example .....	4-2
Figure 5-1: Memory Backup Battery (B1) and Resistor (R3) Locations .....	5-3
Figure B-1: RS-232 Cable Connections .....	B-6

### Tables

Table 1-1: Network Terminal General Specifications .....	1-3
Table 2-1: Shipping Carton Contents .....	2-1
Table 6-1: Network Terminal Failure Messages .....	6-2
Table A-1: CTI-CRYOGENICS Product Customer Support Centers .....	A-2
Table B-1: Result Codes .....	B-7
Table B-2: Network Terminal RS-232 Commands .....	B-8

# Section 1 - Introduction

## General

The Network Terminal is used in multiple On-Board pump installations to provide control of up to 20 pumps from a single point. The Terminal has a built-in keypad and display that allows monitoring and control of any pump on the network. The Network Terminal is available in two different configurations; half panel and right hand panel as shown in Figure 1-1.


The Network Terminal can be connected to a host computer through the Host RS-232 serial port so that the host can also address any pump on the network. The Network Terminal also coordinates the use of roughing valves in a specified group of pumps. This prevents cross contamination of the pumps through the roughing lines during regeneration. On-Board Pumps can be mapped together and the roughing valves in that map are controlled through a token pass protocol. The Network Terminal allows you to initiate regenerations simultaneously to two or more pumps. Refer to **Section 4 - Operation** for more information.

***NOTE:** All personnel with installation and operation responsibilities should become familiar with the contents of this manual to ensure high quality, safe, and reliable Network Terminal performance.*


## On-Board NetLink Option

The Network Terminal can be connected to an On-Board NetLink that allows On-Board Central Control (OCC) for Windows software to communicate with multiple Network Terminals.


***NOTE:** The Network Terminal must either have the communication ports or be upgraded to communicate with the On-Board NetLink. Refer to the **On-Board NetLink Installation, Operation, and Maintenance manual CTI-CRYOGENICS P/N 8040390** for more information.*

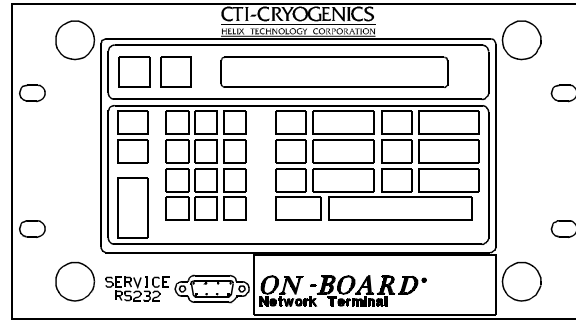

Half Panel

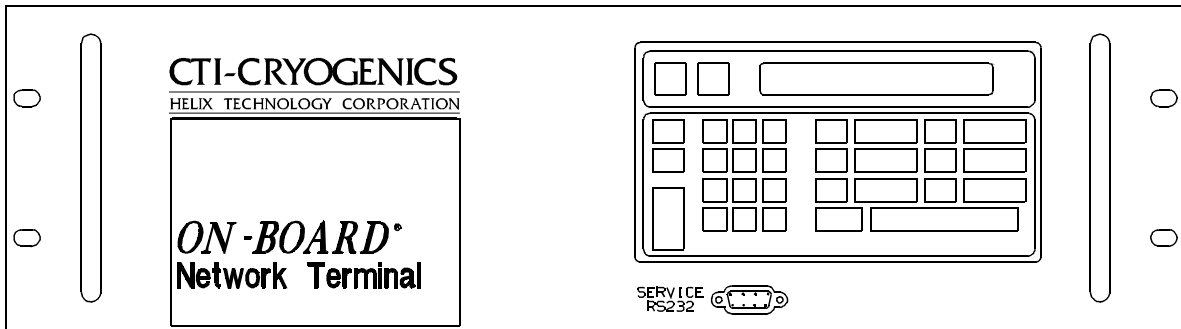

Full Panel

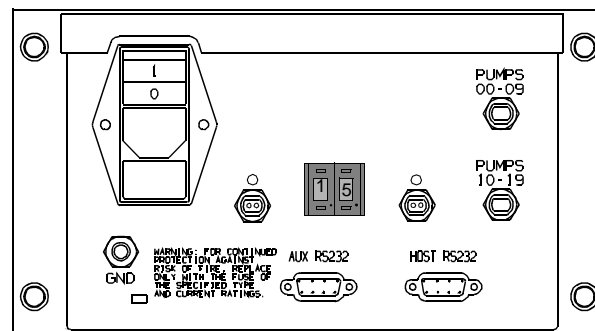

Rear View (Half and Full Panel)



**Figure 1-1: Network Terminal Configurations**

## Specifications



Refer to Table 1-1 and Figures 1-2 and 1-3 for the specifications and dimensions of the half and right hand panel Network Terminal configurations.

**Table 1-1: Network Terminal General Specifications**

Parameter	Value
Weight	11 lbs. (5.5Kg)
Electrical Input	90/125 VAC 50/60 Hz 180/250 VAC 50/60 Hz 1/4 amp maximum
Ambient Temperature	50° F - 100° F (10° C - 38° C)
Communication Interface	Host, Service, Auxiliary: RS-232, 9 pin D connector
Communication Interface Baud Rates	Host: 2400, 9600, 19200, and 38400 Service: 2400, 9600, and 19200 Auxiliary: 2400, 9600, and 19200
Software Interface	Standard On-Board Protocol using pump ID number. Refer to Appendix B for more information.

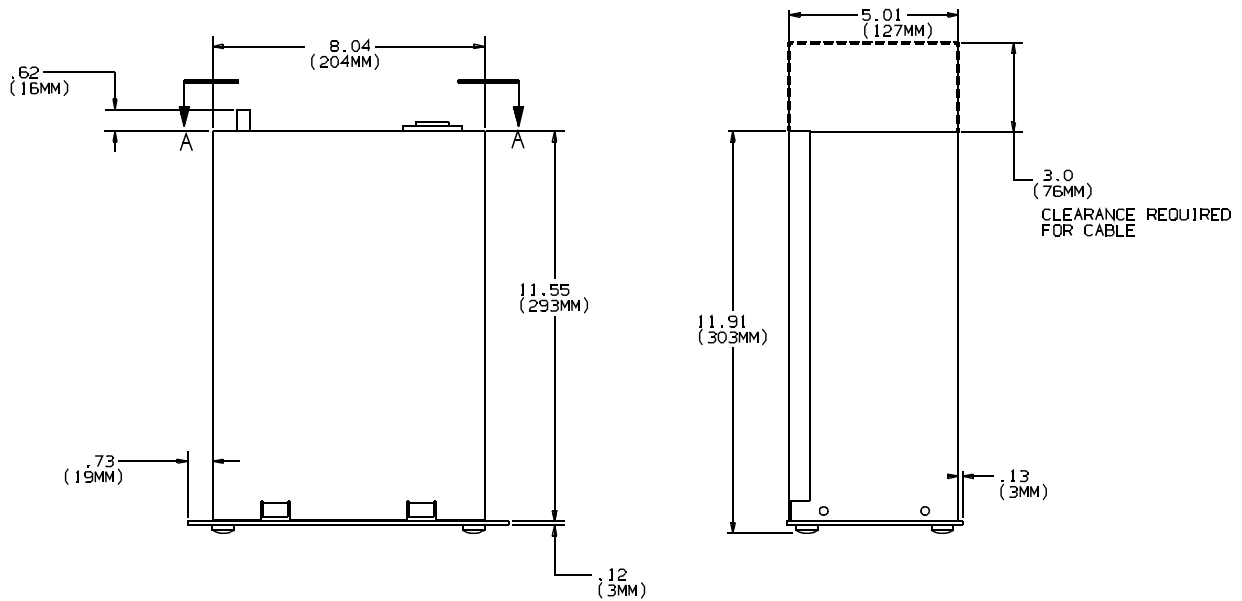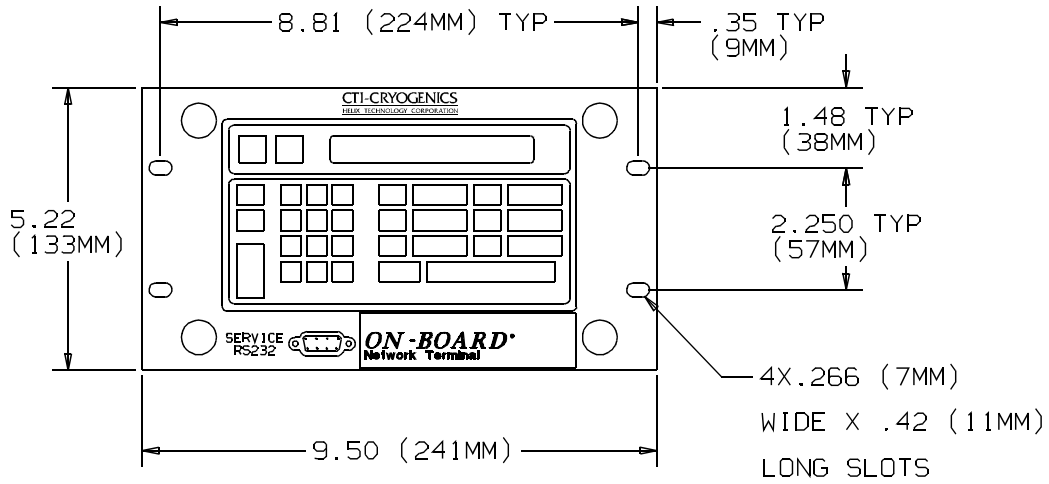

**Figure 1-2: Half Panel Dimensions**

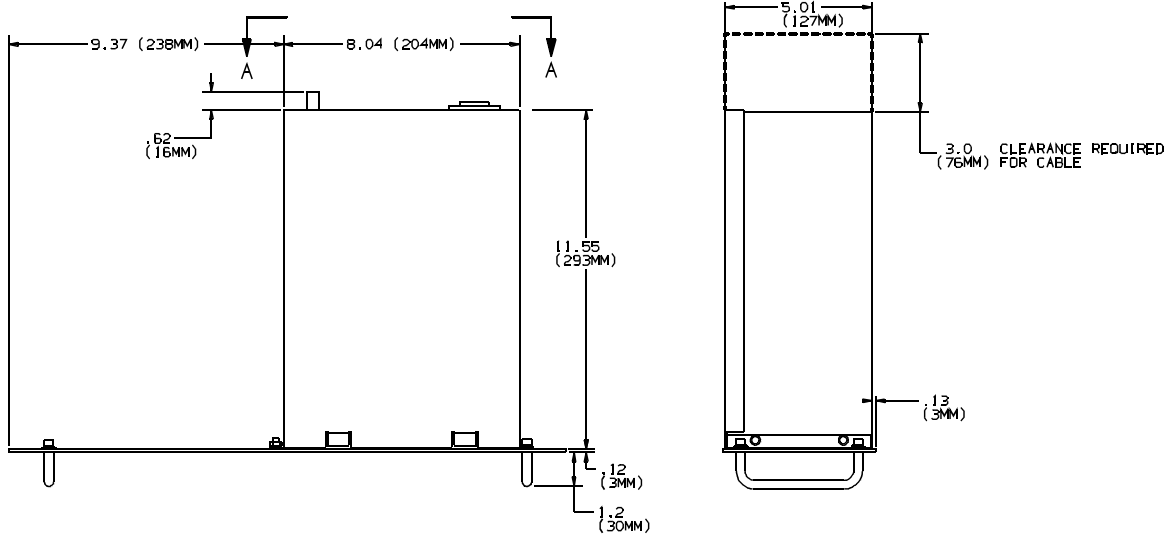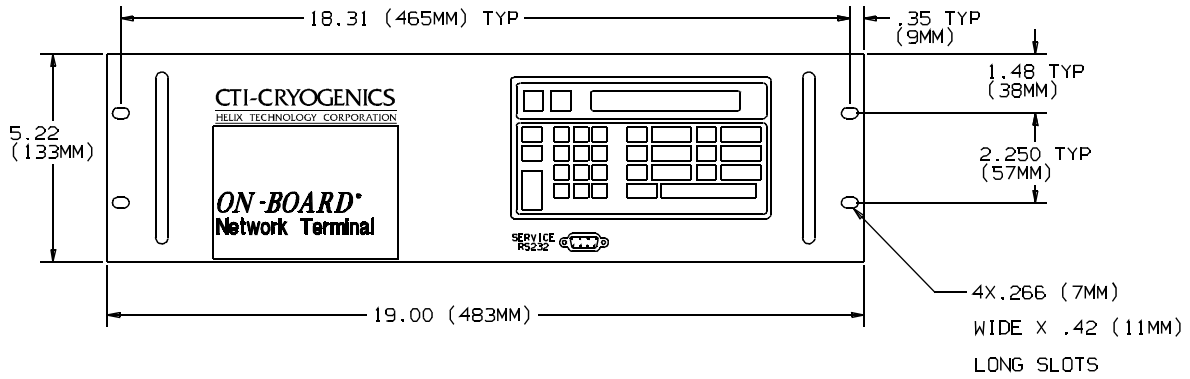


**Figure 1-3: Network Terminal Right Hand Configuration**

## Front Panel Component Description

### Keypad/Display Control Description

The On-Board keypad/display, shown in Figure 1-4, provides a user interface to the Network Terminal for programming and operating all On-Board Pump functions. Figure 1-4 shows the location of all function keys and the alphanumeric display. The paragraphs that follow explain the purpose of each keypad/display function.

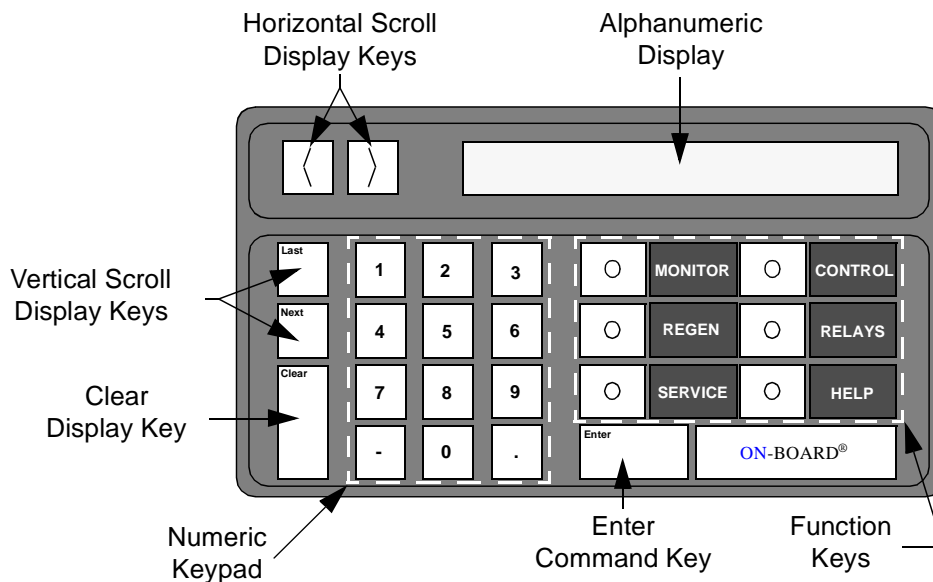

**Figure 1-4: On-Board Keypad/Display**

### Alphanumeric Display

The alphanumeric display shows up to 16 alphanumeric characters of data entry. Messages longer than 16 characters can be viewed by using the horizontal scroll display key.

### Horizontal Scroll Display Keys

The horizontal scroll display keys move the message to the left or right on the alphanumeric display when pressed. These keys are typically used to display a message which is longer than the 16 character width of the display.

### Vertical Scroll Display Keys (Last, Next)

The Last and Next keys allow the user to display the preceding or proceeding messages.

### **Clear Display Key**

The Clear key is used to remove user entered information during programming or device selection.

*NOTE: The Clear key must be pressed before the Enter key is pressed to remove the desired information.*

### **Numeric Keypad**

The numeric keypad is used to enter numeric values for programming and operation.

### **Enter Command Key**

The Enter key is used to accept numeric information which the user has entered via the numeric keypad.

### **Function Keys**

The function keys allow the user to select the software function in which programming or operation is desired.

### **Service RS-232 Port**

The Service RS-232 port allows you, or a CTI-CRYOGENICS Field Service Representative, to connect the RS-232 port of a portable computer to the Network Terminal for communication purposes. The port is mounted on the front panel for easy access and supports baud rates of 2400, 9600, and 19200.

## **Rear Panel Component Description**

### **ON/OFF Switch - Input Power Connector**

The ON/OFF switch and Input Power connector, as shown in Figure 1-1, allows you to turn power ON or OFF and to connect 120/240 VAC to the Network Terminal. The input power connector can be configured to deliver 120 or 240 VAC power to the Network Terminal. Refer to **Section 2 - Installation** for more information.

### **Bonding Stud**

The Bonding Stud labeled *GND*, is intended for applications where Electromagnetic Interference (EMI) may be a problem. It is not to be used as a protective ground. Connect a ground to the Bonding Stud using accepted EMI grounding practices.

### **LED Indicator**

The LED Indicator is a power indicator lamp that illuminates when the power switch is in the ON position.

### **Network Connectors**

The Network Connectors are used to connect an On-Board NetLink and other Network Terminals when multiple On-Board networks are required. Refer to the **On-Board NetLink Installation, Operation, and Maintenance** manual CTI-CRYOGENICS P/N 8040390 for more information.

### **Address Switch**

The Address Switch allows you to select the network address of the Network Terminal that is connected to the On-Board NetLink.

### **AUX RS-232 Port**

The AUX RS-232 port allows you to connect a PC that is running OCC for Windows to control the On-Board network. The port supports baud rates of 2400, 9600, and 19200.

### **Host RS-232 Port**


The Host RS-232 port allows you to connect a host computer to the Network Terminal to address any pump on the network. The port supports baud rates of 2400, 9600, 19200, and 38400.

### **Pumps 00 - 09 Port**

The Pumps 00 - 09 Port is the connector to be used to connect the first ten On-Board Pumps to the Network Terminal as shown in Figure 1-5.

### **Pumps 10 - 19 Port**

The Pumps 10 - 19 Port is the connector to be used to connect ten or more On-Board Pumps to the Network Terminal as shown in Figure 1-5.

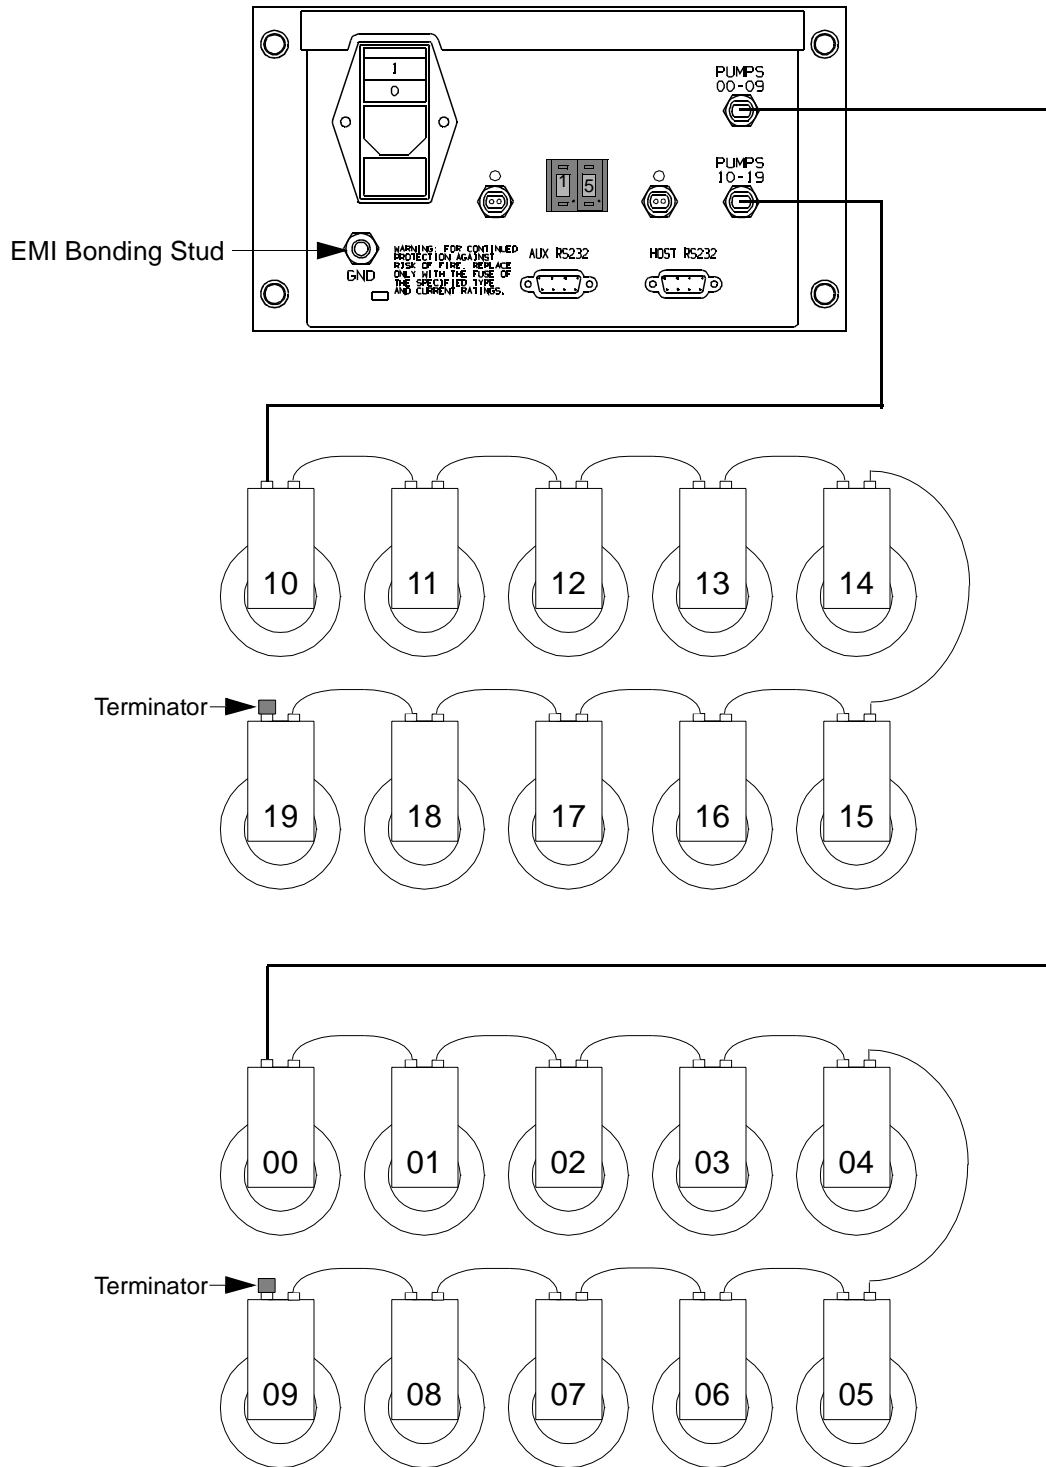

**Figure 1-5: Example of Daisy Chained Pump Configuration**

## Section 2 - Inspection

### General

On receipt, inspect the Network Terminal for evidence of damage. Report any damage to the shipping company at once. Retain the shipping cartons for storage or return shipment.

Inspect the Network Terminal for damage by examining the overall exterior, keypad, electrical connectors, ON/OFF switch, and the power cable for damage.

### Shipping Carton Contents

The Network Terminal is shipped with the components shown in Table 2-1.

**Table 2-1: Shipping Carton Contents**

Part Number	Description	Quantity
8113040GXXX*	Network Terminal - Right Hand Configuration	1
8113039GXXX*	Network Terminal - Half Panel Configuration	1
8113048GXXX*	Network Terminal - Right Hand Configuration, Custom	1
7201020P001	Power Cable - 125 VAC	1
8040375	Installation and Operation Manual	1
7200008P012	Spare Fuses - Type 3AG, 1/4 amp	2
8112545G001	Terminator	2
* Only one Network Terminal configuration (right hand or half panel) is included in the shipping carton depending upon customer order.		

## Section 3 - Installation

### Network Configurations

As many as twenty On-Board Cryopumps can be connected to the Network Terminal. The pumps are networked together using CTI-CRYOGENICS network cables. Before connecting the pumps together, set the address switch on each pump so that each pump has its own number from 0-9.

The network cables are run from pump to pump, daisy chained together as shown in Figure 3-1. The first connection is made to the *Pumps 00-09* connector for pumps 00-09 on the rear panel of the Network Terminal. The pumps need not be connected in sequential numerical order (i.e., you may connect the pumps as follows: 01, 03, 06, 02, 04, etc.). Pumps numbered 10-19 must be connected to the *Pumps 10-19* connector identified in Figure 3-1. The address switches on the pump modules, as shown in Figure 3-2, shall be set to 00-09 respectively but will be recognized by the Network Terminal as pumps 10-19 as shown in Figure 3-1.

The total network chain shall not exceed 1,000 feet. This means that the cable distance from the Network Terminal to the last module could be connected with three 300 foot cables for a total network chain of 900 feet.

Terminators are required to ensure proper data communication between the pump modules and the Network Terminal. The last module on the network chain must have a terminator attached to the unused network connector as shown in Figure 3-1 for proper placement. Two terminators are supplied with the unit so that a terminator may be placed at the end of each of the two network chains.


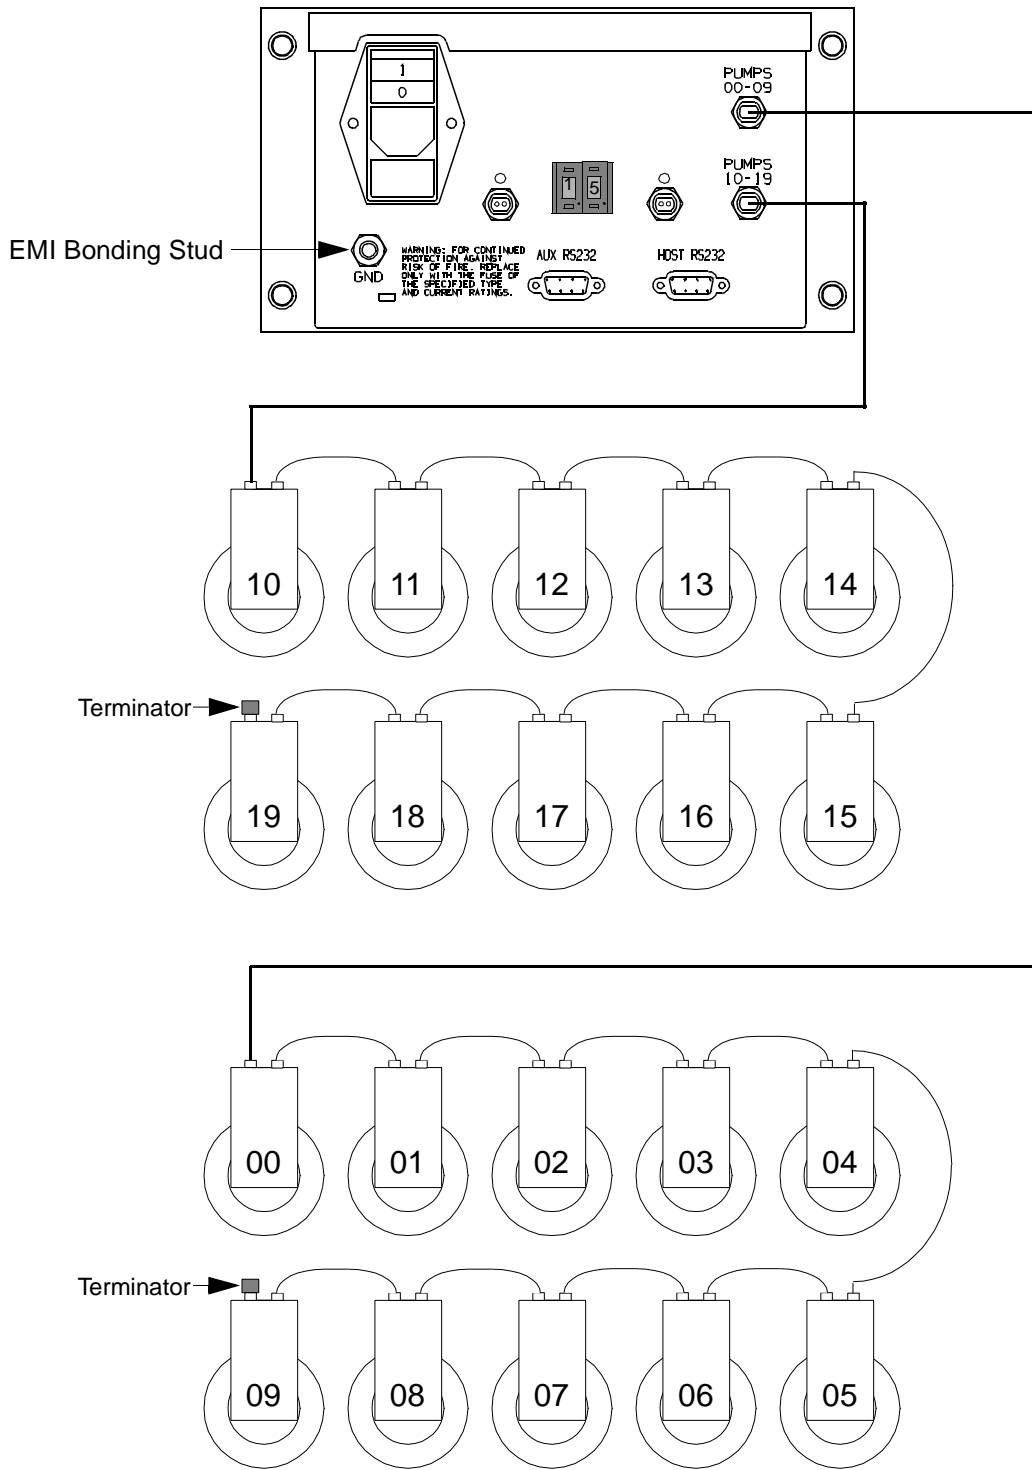


Figure 3-1: Example of Daisy Chained Pump Configuration

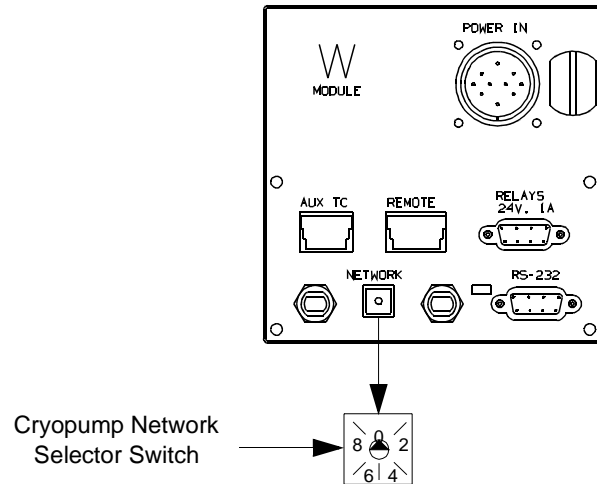

**Figure 3-2: Network Selector Switch Location**

### Power Connections

The Network Terminal is shipped from the factory set to the 110/120 VAC setting. The input power connector will have to be modified if you plan to operate the Network Terminal at 220/240 VAC. Follow the appropriate procedure for your specific operating voltage.

**NOTE:** The Network Terminal is fused for both 110/120 and 220/240 VAC operation. Use either size 3AG or 5 x 20mm 0.25 amp fuses when replacing the fuse.

### 110/120 VAC


1. Insert the provided power cable plug into the receptacle on the rear panel of the Network Terminal.
2. Insert the opposite end of the power cable into 110/120 VAC power receptacle.

**NOTE:** The bonding stud, as shown in Figure 3-1, is intended for applications where Electromagnetic Interference (EMI) may be a problem. It is not to be used as a protective ground. Attach a ground using accepted EMI grounding practices.

3. If desired, connect an EMI ground conductor to the ground stud.
4. Set the power switch to the ON position.

## 220/240 VAC

1. Modify the input power connector as follows:
  - a. Place a small flat head screwdriver in the slot above the lettering and twist out the fuse holder module as shown in Figure 3-3.

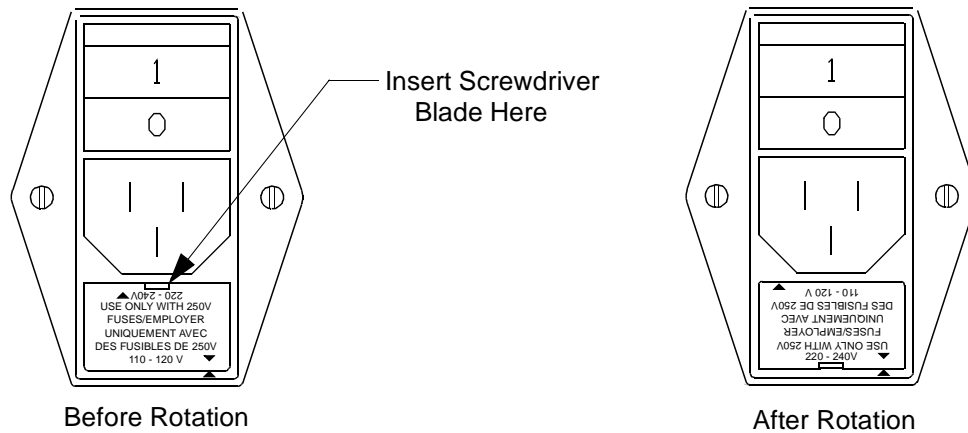

**Figure 3-3: Input Power Connector 220/240 VAC Modification**

- b. Rotate the module 180° and insert the module into the input power connector as shown in Figure 3-3.
- c. Make sure the 220/240 VAC designation aligns with the white arrow as shown in Figure 3-3.

**NOTE:** The provided power cable will have to be modified, or a new cable will have to be purchased, to provide 220/240 VAC power to the Network Terminal. The power connector on the rear panel of the Network Terminal is a standard IEC 320 power connector.

2. If modification is necessary, perform the following steps:
  - a. Cut the plug off the end of the power cord which connects to the power source.
  - b. Connect an appropriate 220/240 VAC plug to the power cable.
3. Insert the power cable plug into the power connector on the rear panel of the Network Terminal.
4. Insert the opposite end of the power cable into a 220/240 VAC power source.

***NOTE:** The bonding stud, as shown in Figure 3-1, is intended for applications where Electromagnetic Interference (EMI) may be a problem. It is not to be used as a protective ground. Attach a ground using accepted EMI grounding practices.*


5. If desired, connect an EMI ground conductor to the ground stud.
6. Set the power switch to the ON position.

## Section 4 - Operation

### Addressing a Pump

To address any pump on the network, refer to Figure 4-1 and perform the following steps:

1. Press the function key for the desired function (i.e., MONITOR, REGEN, etc.).
2. Enter the two-digit number for the pump being addressed (i.e., 00,01,02, etc.) and the display will show that a session with the pump has been opened as shown in Figure 4-1. Then the display will advance to normal pump keypad functionality.

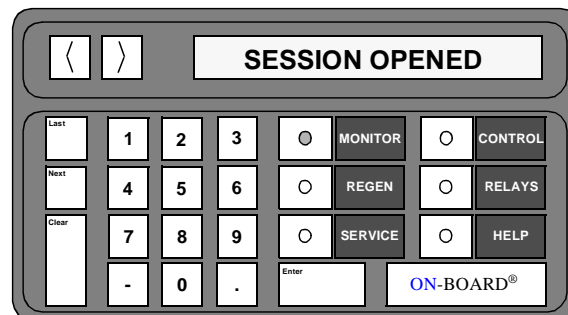


**Figure 4-1: Network Terminal Keypad/Display**

**NOTE:** Opening a session tells you that the Network Terminal now has control of the keypad at the pump. While you are in session for a given pump, the local pump keypad will not respond when pressed. To close a session, press any of the function keys and **CLOSED SESSION** will be displayed. This functionality is in On-Board Module software versions 2.12 and higher.

3. Operate the selected pump in accordance with the On-Board Pump operating instructions contained within the respective Cryopump manual.
4. To change to another pump, press any function key and enter the new two-digit number.

## Roughing Maps

For multi-pump systems that share a roughing pump through a roughing manifold, it is necessary to *map* the Cryopumps as shown in Figure 4-2. A *roughing map* keeps track of which pumps are on which roughing manifold. All Cryopumps that are connected to a single roughing manifold are in the same map. If your system has more than one roughing manifold, then you can have more than one roughing map. It is possible to have up to five roughing maps in a multi-pump On-Board System. When the Cryopumps are properly mapped, the Network Terminal will coordinate the use of the roughing valves for both Full and FastRegen.

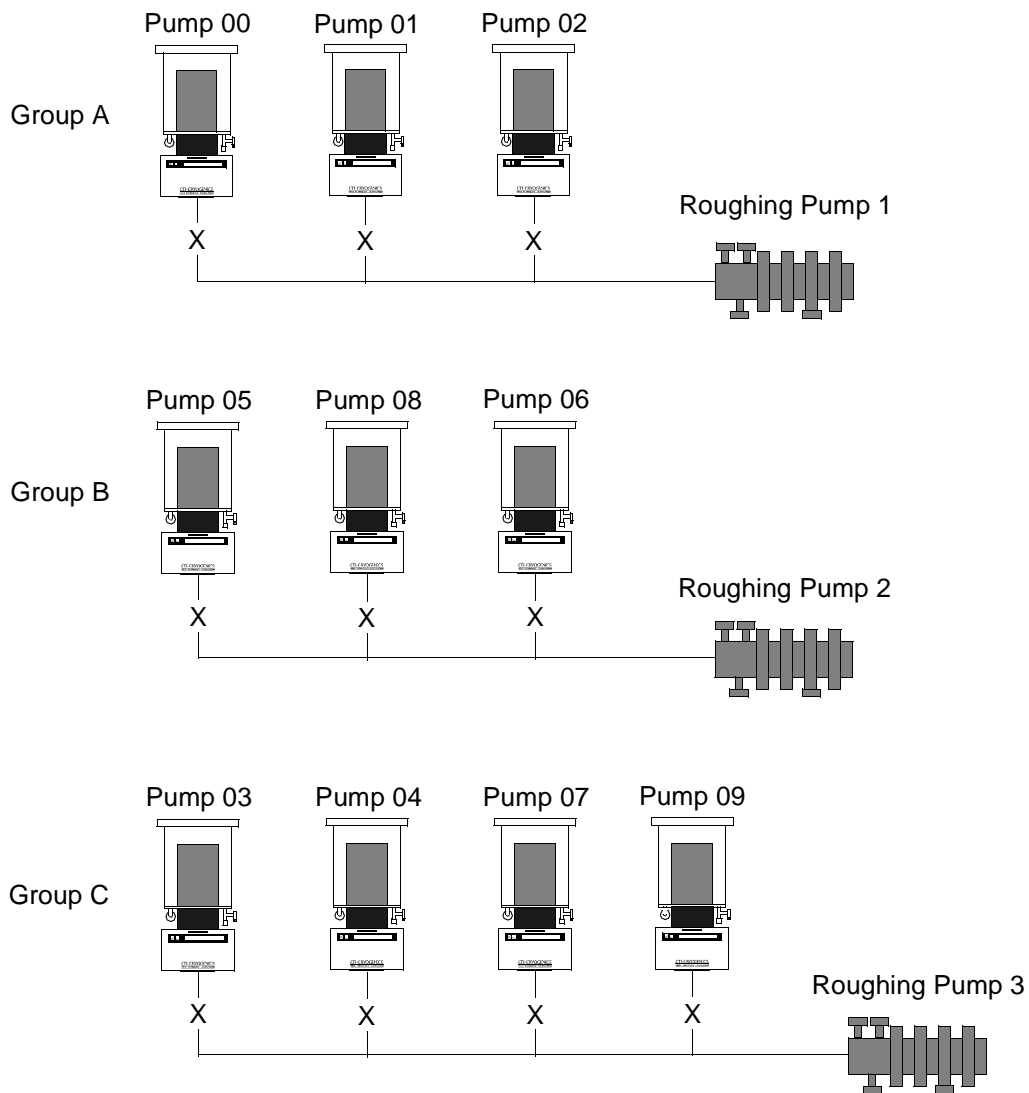

**Figure 4-2: Rough Valve Map Example**

## Rough Valve Map Example Procedure

Use the following procedure to create a rough valve map as shown in Figure 4-2.

**NOTE:** A minimum of 2 pumps per map is required.

1. Press **SERVICE**, then press **9 9**. The display shows serial number and the software version.

**NOTE:** The *TERMINAL ID #XX* in step 2 is present only if the *NetLink* option is installed.

2. Press **Next** to display *TERMINAL ID #XX*.
3. Press **Next**. The display shows number of pumps on network.
4. Press **Next**. The display reads *PASSWORD?*
5. Press **Enter**, then **Next**. The display reads *REGEN LOCK OFF*.
6. Press **Next**. The display reads *ROUGH VALVE MAP*.
7. Press **Enter**. The display reads *MAP A*.
8. Press **Enter**.
9. Press **00 Enter, 01 Enter, 02 Enter, Enter**. Map A is complete. The display now reads *MAP B*.
10. Press **Enter**.
11. Press **05 Enter, 08 Enter, 06 Enter, Enter**. Map B is complete. The display now reads *MAP C*.
12. Press **Enter**.
13. Press **03 Enter, 04 Enter, 07 Enter, 09 Enter, Enter**. Map C is complete.

## Summary

A roughing map describes all of the pumps that share a roughing manifold.

Up to five roughing maps can be set up on a multi-pump On-Board System through the Network Terminal.

If several Cryopumps on the same manifold begin FastRegen, then they must all be started at the same time. The Network Terminal coordinates the simultaneous starting of pumps through **Regeneration Groups** as described within this section.

Once a Cryopump which is contained within a roughing map has started FastRegen, no other Cryopump in that map can start a FastRegen until that pump reaches 115K in cooldown. Full regenerations can be started individually or in groups at any time. If a FastRegen is currently in progress, then the pump in Full regeneration will not be roughed out until the FastRegen pump is below 115K in cooldown.

## Establishing Roughing Maps and Password Protection

1. Press the **SERVICE** key.
2. Press **9 9** (this allows access to the local service function of the Terminal itself rather than a pump). The serial number and the software version of the Terminal will be displayed.

***NOTE:** The **TERMINAL ID #XX** in step 3 is present if the NetLink option is installed.*

3. Press **Next** to display **TERMINAL ID #XX**.
4. Press **Next** to scan the network and to display the number of pumps on the network (up to 20 pumps).
5. Press **Next** to display a password request.
6. Enter a password (if being used); then press **Enter** and **Next**. Press **0** if a password is not being used.

***NOTE:** When operating pumps from a Network Terminal, a common password can only be entered from within the local service of the Network Terminal. All password changes must also be made from this location. If a password is entered at a pump, the Network Terminal will override that password and default it back to the password set at the Network Terminal.*

The display reads **REGEN LOCK OFF**. 1 will turn on lock mode; 0 will turn off lock mode. When lock mode of the Network Terminal is activated, it will lock you out of the regeneration group function.

7. Press **Next**. The display reads **ROUGH VALVE MAP**.
8. Press **Enter**. The display reads **MAP A** and shows which pumps, if any, are currently in that map. You may have to press the right scroll arrow **>** to move the display so that all pumps in that map can be seen.
9. To change the map, press **Enter**. All pumps in MAP A are removed and a new program can be entered into MAP A.
10. Enter the 2-digit number of one of the pumps you want in MAP A.
11. Press **Enter** to accept that pump number, or press **Clear** to remove that number.

12. Enter the next number for that map, etc.
13. When all of the pump numbers have been entered, press **Enter** one more time and MAP A will be stored and the display will then read MAP B and display all of the pumps in that map.

*NOTE: Up to 20 pumps (that is, all the pumps on the network) can be put into a single map, or as few as two pumps into a single map.*

14. To start another map, begin entering pump numbers into MAP B.

## Full Rough Coordination Functionality

*NOTE: This feature exists only in some custom Network Terminals and may not be available in the Network Terminal you are operating.*

The *Full Rough Coordination* feature allows all of the pumps sharing a common roughing manifold, during full regeneration, to rough out to base pressure together. The *Full Rough Coordination* feature must be turned ON, and the pumps must be started from within a *group* regeneration for this activity to occur. If this feature is turned off, the pumps will rough to base pressure.

Since this functionality will only operate when the pumps are started from a group regeneration, any other method for starting full regeneration cycles (pumps regenerated individually or as a result of power failure) will be handled in the normal manner: the pumps will individually rough. If a full group regeneration cycle is interrupted due to power failure, the Network Terminal will handle the roughing in the normal manner.

*NOTE: The On-Board Waterpump W Module and the On-Board Monomer Module do not support the Full Rough Coordination feature.*

### Turning On the Full Rough Coordination Feature

1. Press **SERVICE**, then press **9 9**, then press **Next**. The display shows serial number and the software version.

*NOTE: The TERMINAL ID #XX in step 2 is present only if the NetLink option is installed.*

2. Press **Next** to display *TERMINAL ID #XX*.
3. Press **Next**. The display shows number of pumps on network.
4. Press **Next**. The display reads *PASSWORD?*
5. Press **Enter**, then **Next**. The display reads *REGEN LOCK OFF*.
6. Press **Next**. The display reads *ROUGH VALVE MAP*.

7. Press Next. The display reads *OFF FULL COORDINATION*.
8. Press 1 to turn Full Rough Coordination feature ON. Press 0 to turn it OFF.

## Power Fail Coordination Functionality

*NOTE: This feature only exists in some custom Network Terminals and may not be available in the Network Terminal you are operating. The feature is only supported by the On-Board Fast Regen Implant Module.*

The Power Fail Coordination feature optimizes recovery time for implant modules by allowing all of the cryopumps sharing a common roughing manifold to rough out to base pressure together. The feature will only work when both *Full Rough Coordination* and *Power Fail Coordination* are turned ON. If either of these features are turned OFF, the cryopumps will sequentially rough out to base pressure.

### Turning ON the Power Fail Coordination Feature

1. Press **SERVICE**, then press **9 9**. The display shows the serial number and software version.
2. Press the Next key until the *PASSWORD?* prompt is displayed.
3. Enter the password and press **Enter**.
4. Press the **Next** key until *OFF PWR FAIL COORDINATION* is displayed.
5. Press 1 to turn the Power Fail Coordination ON. Press 0 to turn the Power Fail Coordination OFF.

## Regeneration Groups

A *Regeneration Group* is any group of Cryopumps that you want to regenerate together. These Cryopumps may or may not be in the same roughing map. Refer to **Setting up Regeneration Groups with the Network Terminal** and **Starting a Group Regeneration From the Network Terminal** within this section for more information.

A multi-pump On-Board System can have up to five Regeneration Groups. When the regeneration is started, the Network Terminal will coordinate the use of the roughing manifold for each Regeneration Group and Roughing Map.

There is a special requirement for FastRegen. This requirement is that a Cryopump in the FastRegen process must have use of the roughing valve at specific times. Because of this requirement, if there is more than one

Cryopump on a roughing manifold and they are to be put through a FastRegen, then they must all be started and run at the same time so that they can all be roughed at the same time. This also means that if there is a Cryopump in the process of FastRegen, then no other Cryopump on that roughing manifold can start a FastRegen until that Cryopump is finished.

This is not true for Full regeneration. Full regenerations can be started and stopped at any time, even if another pump on the same roughing map is in regeneration.

### Setting up Regeneration Groups with the Network Terminal

1. Press **REGEN 9 9**.
2. Display reads *1-MULTI PUMP RGN*.
3. Press **Next**. The display reads *1=GROUP SELECT*.
4. Press **Next**. The display reads *1-MULTI*.
5. Press **Enter**. The display reads *1-MULTI* and shows which pumps, if any, are currently in that group. You may have to press the right scroll arrow > to move the display so that all pumps in that group can be seen.
6. To change the group, press **Enter**. All pumps in group 1 are removed and a new program can be entered into group 1.
7. Enter the 2-digit number of one of the pumps you want in group 1.
8. Press **Enter** to accept that pump number, or press **Clear** to remove that number.
9. Enter the next number for that group, etc.
10. When all of the pump numbers have been entered, press **Enter** one more time and the display will go to group 2 and display all of the pumps in that group.

***NOTE:** Up to 20 pumps (that is, all the pumps on the network) can be put into a single group or as few as one pump .*

11. To select another group, press **Next** until the desired group is reached and press **Enter** to begin programming.
12. Press **Last** to return to where you can start a regeneration (see Starting a Group Regeneration).

### Starting a Group Regeneration From the Network Terminal

1. Press **REGEN 9 9**. The display reads *1-MULTI PUMP RGN*. The 1 indicates that group 1 is selected for regeneration.
2. Press **1** to start a regeneration. The display reads *PRESS 2 OR 3 REGEN PUMPS?*.
3. Press **2** for a Full regeneration, press **3** for a FastRegen, press **Clear** to cancel selection.
4. If you want to change the selected group number, press **Next**. The display reads *1=GROUP SELECT*.
5. Press **Enter** to change the selected group.
6. Enter the group number you wish to regenerate (2 for example) and press **Enter**.
7. Press **Last**. The display reads *2-MULTI PUMP RGN*.
8. To exit out of the multi-pump programming and selection press any of the six function keys such as **MONITOR**.

### The RS-232 Communication Ports

The Network Terminal has three RS-232 ports, each of which provides access to the Network Terminal or pump information and control. All three of the ports can be used simultaneously.

The ports are named so that they can be identified when setting the baud rate for that port. Also, the names can indicate a relative usage for each of the ports. For example, the HOST RS-232 port should typically be used for communications to the system controller so that when installed, you will know that port is constantly being used and should not be disconnected.

The AUXILIARY port and the SERVICE port could be used for programs such as On-Board Central Control. The front SERVICE port provides access to a port even when the Network Terminal is installed in a rack.

Each of the three RS-232 ports can be configured to have the same or different baud rates. The allowable rates are 2400, 9600, 19200 and 38400 for the Host port and 2400, 9600, and 19200 for the Service and Auxiliary ports. The baud rate can only be set from within the *SERVICE 9 9* function of the Network Terminal and cannot be set through an RS-232 command.

### Setting the RS-232 Port Baud Rates

1. Press **SERVICE 9 9** to access to the local Service function of the terminal. Press **Next**, then **Next** again to display the password prompt.
2. Enter a password; then press **Enter** and **Next**.
3. Continue pressing **Next** until *9600 HOST BAUD* is displayed.
4. To change the baud rate press **0** for 2400, **1** for 9600, **2** for 19200 or **3** for 38400 baud.
5. Press **Next** to display *9600 SERVICE BAUD*.
6. Press **Next** to display *9600 AUX BAUD*.
7. Press **Next** or any function key to exit the local Service function.

## Section 5 - Maintenance

### Memory Backup Battery

The memory backup battery is the only part within the Network Terminal that you can maintain. This battery provides memory backup capabilities for items such as rough valve maps, multi-pump REGEN programs, and the unit serial number when AC power is removed from the Network Terminal.

The memory backup battery is a 3.0 Volt, Panasonic P/N BR2325 lithium battery.

#### Symptoms

You can suspect the battery voltage being low if the following parameters cannot be retained by the Network Terminal:

- Rough Valve Maps
- Multi-pump REGEN Programs
- Unit Serial Number

#### Battery Voltage Test

Use the following procedure to see if the memory backup battery is in need of replacement.



#### WARNING

Make sure the Network Terminal is disconnected from the supply voltage before performing this procedure.

#### CAUTION

Make sure that you and the Network Terminal are properly grounded to prevent electrostatic damage of chassis components.

1. Turn power OFF to the Network Terminal and remove the power cord from the power source.


2. Remove the Network Terminal top cover by removing the two screws on the rear panel and lifting the cover from the rear of the chassis.
3. Refer to Figure 5-1 to locate the battery B1 and resistor R3 on the circuit board.
4. Using a voltmeter, place the negative (-) probe on the lead of R3 closest to J6 as shown in Figure 5-1. Place the positive (+) probe on the open face of battery B1.
5. Record the voltage reading. The minimum voltage reading should be 1.8 volts. The maximum voltage reading should be 3.0 volts. Proceed with step 6 if the voltage is below 1.8 volts. Proceed with step 7 if the voltage is above 1.8 volts.
6. Refer to **Memory Backup Battery Replacement** if the battery voltage is below 1.8 volts.
7. Replace the cover, refer to **Appendix A**, and call the local customer support center for further assistance.

## Memory Backup Battery Replacement

***NOTE:** Replace the existing battery with a 3.0 Volt, Panasonic P/N BR2325 lithium battery or equivalent.*

1. Turn power OFF to the Network Terminal and remove the power cord from the power source.
2. Remove Network Terminal top cover by removing the two screws on the rear panel and lifting the cover from the rear of the chassis.
3. Refer to Figure 5-1 to locate the battery B1 on the circuit board.
4. Using a screwdriver, gently lift the clip which holds the battery in the socket and slip the battery out of the socket.
5. Install the new battery using the same method as described in step 4.
6. Replace the Network Terminal top cover and screws.
7. Connect the power cord to the power source.
8. Turn power ON.
9. Refer to **Section 4 - Operation** to re-establish rough valve maps, multi-pump REGEN programs.

***NOTE:** The unit serial number is no longer in memory and cannot be reentered. For future reference, the serial number can be found on the rear panel of the Network Terminal.*

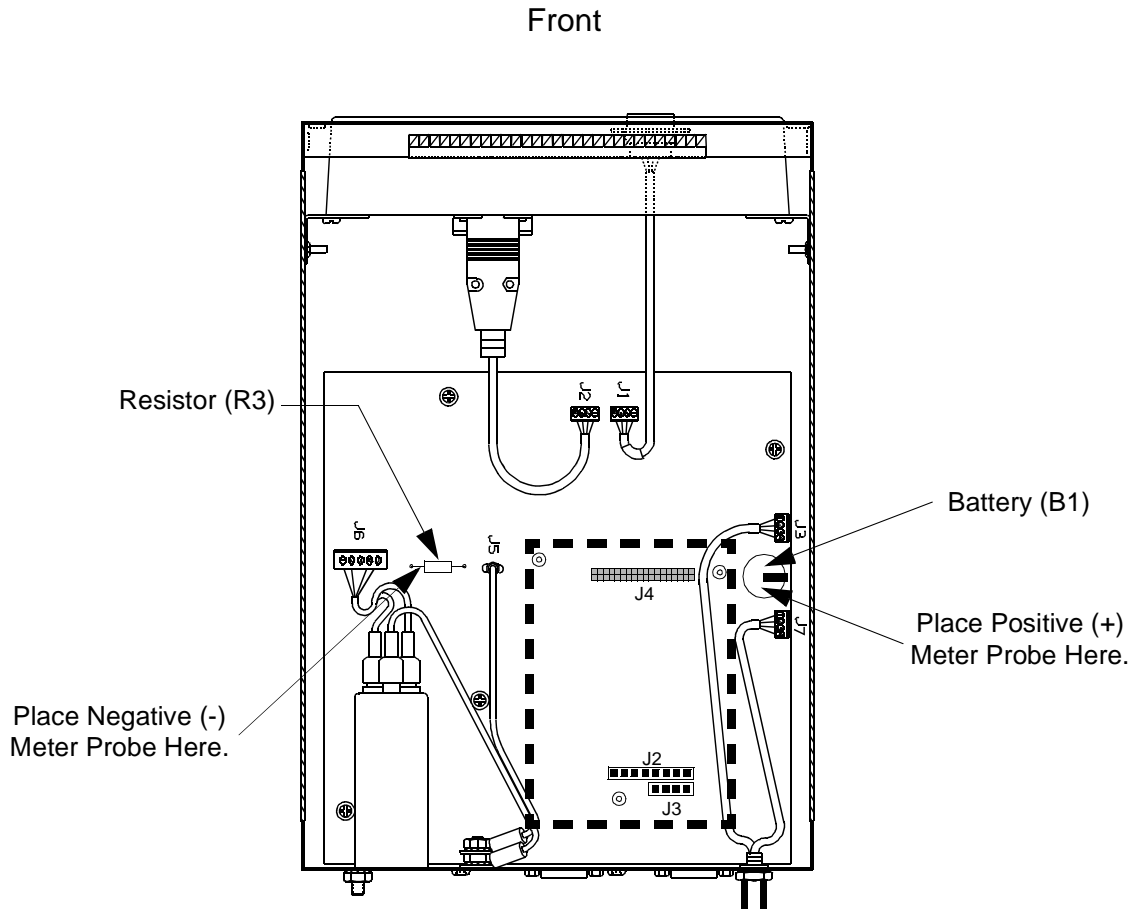

**Figure 5-1: Memory Backup Battery (B1) and Resistor (R3) Locations**

## Section 6 - Troubleshooting

### If You Have Problems Starting A Group FastRegen

If you attempt to start a Group FastRegen and *GROUP REGEN ERR* is displayed on the Network Terminal keypad/display, it means that the pumps were not started into regeneration for one of the following reasons:

1. One or more of the pumps in the group is too warm (above 50K) to initiate FastRegen.
2. One or more of the pumps in the group is not FastRegen compatible or the group contains pumps with incompatible FastRegen Control Modules.
3. One or more of the pumps in the group is not detected as being present by the Network Terminal.

### If You Cannot Communicate With A Pump

Perform the following steps if the Network Terminal does not seem to communicate with a pump:

1. Check the pump address of the pump that you cannot communicate with and make sure it has a unique address compared with the other pumps within the system.
2. Make sure that a terminator has been installed in the network port on the last On-Board module within each group (00-09 and 10 -19).
3. Make sure that power is available to the pumps. Make sure the LED on the On-Board Module panel is illuminated.
4. Make sure that all network cables are connected properly.

## Network Terminal Failure Messages

**Table 6-1: Network Terminal Failure Messages**

Message	Possible Problem
Session Lost	Communication was lost to that pump. Line break or noise.
Session Failed	A session was attempting to open and there was a line break or noise.
NetLink Failure	Network Terminal was at a pump but not in session (Monitor PUMP #06) and there was a line break or noise.

# Appendix A - Customer Support Information

## Introduction

Refer to Table A-1 for the nearest Customer Support Center for technical assistance or service for CTI-CRYOGENICS products. North American customers may call 800-FOR-GUTS (800-367-4887) 24 hours a day, seven days a week. All other customers must call their local Customer Support Center.

***NOTE:** Please contact the Customer Support Center in Mansfield, Massachusetts in the United States of America by dialing 508-337-5599 if a Customer Support office is not located in your area.*

Please have the following information available when calling so that we may assist you:

- Product Part Number
- Product Serial Number
- Product Application
- Specific Problem Area
- Hours of Operation
- Equipment Type
- Vacuum System Brand/Model/Date of Manufacture

For your convenience, you may also e-mail us at:

*contact@helixtechnology.com*

Visit us at our corporate website:

*www.helixtechnology.com*

**Table A-1: CTI-CRYOGENICS Product Customer Support Centers**

<p><b>United States and Canada</b></p> <p><b>Guaranteed Uptime Support Line GUTS®</b></p> <p>Dial: <b>800-FOR-GUTS</b> (800-367-4887) (within USA) 508-337-5599 (outside USA) <i>24 hours a day, seven days a week</i></p> <p><b>Corporate Headquarters:</b> 800-379-7224 (within USA) 508-337-5000 (outside USA)</p> <p><b>Austin, TX:</b> 800-324-6445 (within USA) 512-912-2800 (outside USA)</p> <p><b>Longmont, CO:</b> 800-776-6543 (within USA) 303-652-4400 (outside USA)</p> <p><b>Santa Clara, CA:</b> 800-324-6449 (within USA) 408-562-5940 (outside USA)</p>	<p><b>Germany, Italy, Denmark, Switzerland, Holland, Norway, The Netherlands</b></p> <p>Dial: +(49) 6151-959-55 <i>24 hours a day, seven days a week</i></p>
<p><b>France, Spain, Portugal, Greece, Belgium, North Africa</b></p> <p>Dial: +(33) 1-6935-2600 <i>24 hours a day, seven days a week</i></p>	<p><b>United Kingdom, Ireland, N. Ireland, Scandinavia</b></p> <p>Dial: +(44) 1-506-460017 <i>24 hours a day, seven days a week</i></p>
<p><b>Japan</b></p> <p>Dial: +(81) 0120-60-4887 <i>24 hours a day, seven days a week</i></p>	<p><b>Korea</b></p> <p>Dial: +(82) 2-577-3181 <i>24 hours a day, seven days a week</i></p>
<p><b>Taiwan</b></p> <p>Dial: +(886) (3) 516-9022 <i>24 hours a day, seven days a week</i></p>	<p><b>China</b></p> <p>Dial +(86) 21-6279-1389 <i>24 hours a day, seven days a week</i></p>
<p><b>Australia, New Zealand, Tasmania</b></p> <p>Dial: +(612) 9-4810748 <i>24 hours a day, seven days a week</i></p>	<p><b>Singapore, Malaysia, Philippines, Indonesia</b></p> <p>Dial: +(65) 268-2024 <i>24 hours a day, seven days a week</i></p>
<p><b>India</b></p> <p>Dial: +(91) 22-7632906 <i>24 hours a day, seven days a week</i></p>	<p><b>Israel</b></p> <p>Dial: +(972) 3-9247710 <i>24 hours a day, seven days a week</i></p>

# Appendix B - Network Terminal RS-232 Interface Protocol Format

## Introduction

The format of RS-232 messages between a computer device (the HOST) and the Network Terminal (slave) is the same for both directions of message flow (HOST transmitted or slave transmitted). Each message consists of a series of ASCII characters transmitted via a standard RS-232 asynchronous framing convention of one (1) start bit, seven (7) data bits, a parity bit generated for even parity, and one (1) stop bit; at a transmission rate of 2400, 9600, 14200, and 38400 baud.

The message packet is composed of a starting flag character (the \$ character, hex 24), followed by a P and the pump address (example P00=PUMP #0, P01=PUMP #1), when talking to a pump (N when talking to a Network Terminal), followed by a message dependent data field, followed by a message checksum character, terminated by an ASCII carriage return code (hex 0D). The pump address is set by means of a rotary switch on the On-Board Pump Module. The starting flag character serves the unique purpose of synchronizing the receiver to the transmitter, by signaling the start of the message packet. This '\$' code is not contained in the set of characters used to construct the data field or the checksum character, and therefore establishes a fixed reference point to sync up data flow. Whenever either receiver (HOST or slave) receives a '\$' character, all history and status of previous partial packet data (if any) is aborted and lost, and a packet message is started anew.

The data field consists of from one (1) to a maximum of fourteen (14) ASCII characters, the meaning of which is defined in the Pump Command List for commands and responses. All characters with the exception of '\$' and Carriage-Return (0D hex) may be employed in the data field, if suitable.

The message checksum character is employed to guard against garbled or incorrect messages being received and acted upon, causing undesirable or damaging results. Only messages which are conveyed accurately and intact from the master to slave (or visa versa) are accepted and acted upon. The checksum character which follows the data field is computed by a modified binary sum technique (described later) over the characters composing the data field. The transmitting unit generates this sum based on the characters

it used to produce the data field, and appends it after the field just prior to the CR code terminator. The receiving unit performs the same checksum algorithm on all characters which it receives between the '\$' character and the character just prior to the CR terminator (non-inclusive). If this sum matches the final character preceding the CR terminator, then the message is validated and processed by the receiver. If not, then an error has occurred and the action taken depends on whether the receiver is the HOST or slave unit. The checksum algorithm generates a character between ASCII '0' and 'o' (30 hex to 6F hex) inclusive.

## Checksum Algorithm

Perform the 8 bit (modulo 256) sum of all the ASCII characters sent in the data field (with the most significant bit cleared to 0, ignore parity). This is performed for one to fourteen character code bytes. Fold the resulting eight bit sum into six bits by exclusive *oring* the two MSBs of the sum (D7, D6) with the two LSBs (D1, D0) of the sum such that the new D1 is the old D1 XOR D7 and the new D0 is the old D0 XOR D6. The resulting lower six bits (D5 - D0) are then masked off, producing a code range of from 00 to 3F hex. This is then added to the ASCII code for '0' (30 hex), generating the final printable checksum character in the range of 30 hex to 6F hex ('0' - 'o').

Message traffic is always originated by the HOST unit. This message is referred to as a command or query. Commands cause specific actions to occur in the On-Board Module. Queries request that the On-Board Module reply with status or other parametric information. The On-Board Module responds to all such correctly received messages with a response message. The pairing of these command-response or query-response message sets defines a transaction or exchange. If a faulty message is received by the On-Board Module (due to improper production in the host, or transmission media failure), the message is discarded and no response is sent back to the host as a reply. The host must be able to detect that either no response or an invalid response was received from the slave (through time-out and checksum detection), and if desired, repeat the message to the slave in an attempt to secure a valid transaction.

All communications between a host computer and the Network Terminal will occur within this message transaction framework. Software operating on the host computer must generate and interpret the message response pairs to properly execute and control remote operation and data-logging of the On-Board Module. Software within the On-Board Module interprets these valid messages and returns appropriate replies, as documented in the On-Board RS-232 command list. Error code messages may be returned by the On-Board Module if a valid message packet is received but the data

field contents are not correct and cannot be interpreted. This is not a communications error, but a software error. Invalid commands, improper parameter ranges, or requests to perform operations which are disallowed for some reasons all result in an error message reply.

There are five categories of error messages. Each of the first four categories has two possible messages. The first is an error under normal conditions. The second is an error message that also signals a recent power loss. If a power loss signal is received, this flag can be reset by using the S command.

1. The normal reply for an understandable and executable message is A. If this inquiry is the first since a power failure, the message is B.
2. If a command is sent that cannot be executed under any conditions, the error message is E. If this inquiry is the first since a power failure, the message is F.
3. If a command is sent that cannot be executed except under certain conditions, due to interlocks, the return message is G. If this inquiry is the first since a power failure, the message is H.
4. If a proper command is sent but cannot be acted upon because another serial port has locked out access to all other serial ports, the response is I. If this inquiry is the first since a power failure, the response is J.
5. A fifth category for error messages consists of errors associated with the Network Terminal's inability to find a pump on the network. A response of Z (typically a "\$ZBCOMFAIL message) indicates that the Network Terminal could not address a pump on the network, most likely due to an incorrect address or powered down pump.

**NOTE: NOTE:** *The above error messages and the result codes shown in Table B-1, refer to both the Network Terminal and pump error messages. The "B", "F" and "H" responses to a host from a pump may never be seen since they will be cleared by the Network Terminal. If you wish to have your system controller recognize a power failure signal which is recorded in the pump, you should use the lower case t command as described in the RS-232 command list of the appropriate On-Board Cryopump User's Manual.*

The following is an example of a typical exchange:

Host Sends query to get back On-Board Module Version Information for Pump #1

	Flag	Pump Address	Data Field	Checksum	Terminator
ASCII	[\$]	[P] [0] [1]	[@]	[b]	[CR]
Hex	[24]	[50] [30] [31]	[40]	[62]	[0D]

Checksum of Pump Address and Data Field

Bits 76543210

Sum of

50	01010000
30	00110000
31	00110001
40	01000000

Equals 11110001 or Hex F1

Bits 7 & 6 aligned for

XOR	00000011
XOR result	11110010
Mask D5, D0	00110010
Addend '0'	00110000
Final Chk	01100010 Hex 62, ASCII 'b'

Slave sends reply of AP A2.01, meaning no error, Pump version A2.01.

	Flag	Data Field	Checksum	Terminator
ASCII	[\$]	[A] [P] [] [A] [2] [.] [0] [1]	[a]	[CR]
Hex	[24]	[41] [50] [20] [41] [32] [2E] [30] [31]	[61]	[0D]

Checksum of hex data field:


Bits 76543210

Sum of


41	01000001
50	01010000
20	00100000
41	01000001
32	00110010
2E	00101110
30	00110000
31	00110001
Equals	10110011 or hex B3 modulo 256.

Bits 7 & 6 aligned for

XOR	00000010
XOR result	10110001 or B1.
Mask D5, D0	00110001
Addend '0'	00110000
Final Chk	01100001 Hex 61, ASCII 'a'

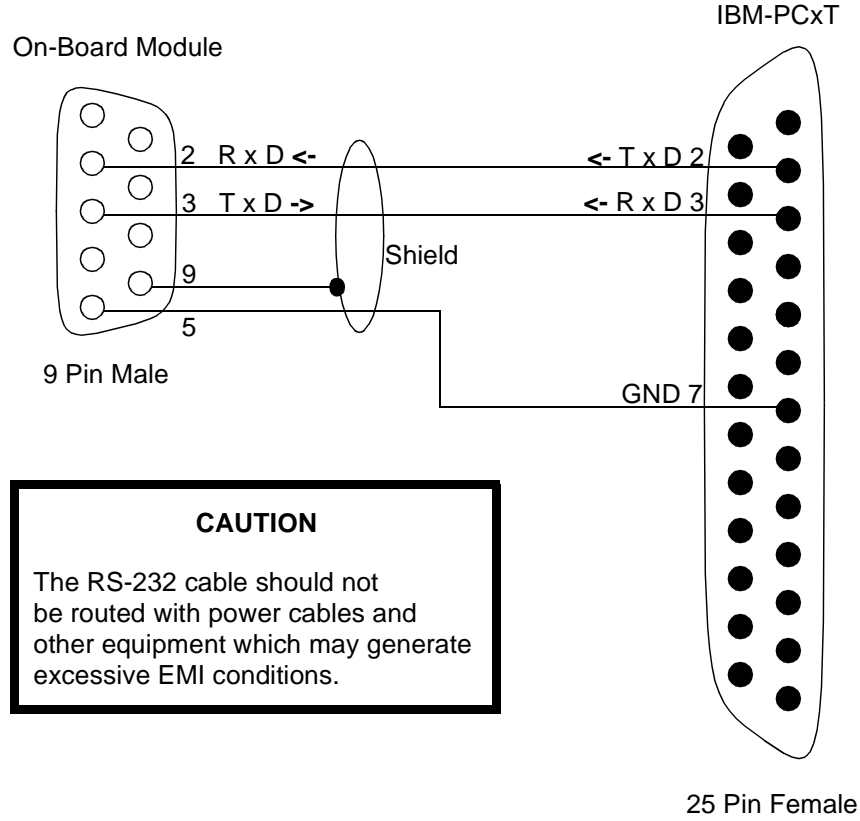

**On-Board Module to IBM-PCxT**

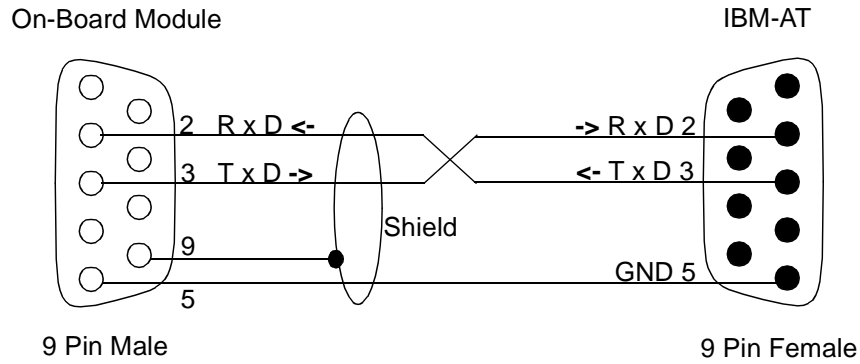

**On-Board Module to IBM-AT**

**NOTE:** Connectors should be of a metal case type and cable lengths should not exceed 40 feet.

**Figure B-1: RS-232 Cable Connections**

## Result Codes

All of the RS-232 ports support hardware and software busy signals. Use pin 8 of the RS-232 Connector for clear to send (CTS) hardware busy. Use hardware and XON and XOFF for software.

**Table B-1: Result Codes**

Letter	Description
A	Command understood, resultant reply (if any) follows, no power failure or reset occurrences since last acknowledgment.
B	Command understood, resultant reply (if any) follows, also a reset event has occurred which has not been acknowledged. This may require messages to synchronize the state information between boxes.
E	Invalid command token or invalid data argument for the given command. No power failure or reset occurrences since last acknowledgment.
F	Invalid command token or invalid data argument for the given command, also a reset event has occurred which has not been acknowledged.
G	Proper command which cannot be acted upon currently for some reason which may be temporary or correctable. No power failure or reset occurrences since last acknowledgment.
H	Proper command which cannot be acted upon currently for some reason which may be temporary or correctable, also a reset event has occurred which has not been acknowledged.
I	Proper command sent but cannot be acted upon because another serial port has locked out access to all other serial ports. No power failure or reset occurrences since last acknowledgment.
J	Proper command sent but cannot be acted upon because another serial port has locked out access to all other serial ports. Also a reset event has occurred which has not been acknowledged.

**Table B-2: Network Terminal RS-232 Commands**

Command	Parameter	Description
?	None	Acknowledges that host computer is aware of a power reset state at the multiplexor, resetting the internal state which causes the 'A' reply to be returned as a 'B'. This is sent as an initializes the host to be in sync with the Network controller, so that subsequent resets are then detectable when the controller returns 'B' for the normal 'A' status reply.
@	None	Returns an identifier string indicating module type and software revision level. Format is : "M AN.M" where the M indicates a multiplexor type module, and the A letter reflects the option compliance type N.M is a decimal radix version number (2.0, 2.1, - 9.9 etc.). Major revisions may increment N to the next ASCII number value. Any change will increase the M minor number to the next level.
A	?	If ? as argument then returns the eleven character serial number for the multiplexor unit.

**Table B-2: Network Terminal RS-232 Commands (Continued)**

Command	Parameter	Description																																										
B	None	<p>Returns a numeric code that identifies which pump modules are currently active on the network. When this command is sent, the network multiplexor sends out a polling request to all pumps. This takes a little bit of time. Once completed, the pumps found to be active are configured according to the rough valve cooperation groupings already defined in the Network controller. The returned code is a number from 0 to 1,048,575 decimal, comprised of the sum of binary bit weights for each of the twenty possible pumps according to the following information:</p> <table data-bbox="909 772 1153 1549"> <thead> <tr> <th>PUMP #</th> <th>Weight</th> </tr> </thead> <tbody> <tr><td>0</td><td>1</td></tr> <tr><td>1</td><td>2</td></tr> <tr><td>2</td><td>4</td></tr> <tr><td>3</td><td>8</td></tr> <tr><td>4</td><td>16</td></tr> <tr><td>5</td><td>32</td></tr> <tr><td>6</td><td>64</td></tr> <tr><td>7</td><td>128</td></tr> <tr><td>8</td><td>256</td></tr> <tr><td>9</td><td>512</td></tr> <tr><td>10</td><td>1024</td></tr> <tr><td>11</td><td>2048</td></tr> <tr><td>12</td><td>4096</td></tr> <tr><td>13</td><td>8192</td></tr> <tr><td>14</td><td>16384</td></tr> <tr><td>15</td><td>32768</td></tr> <tr><td>16</td><td>65536</td></tr> <tr><td>17</td><td>131072</td></tr> <tr><td>18</td><td>262144</td></tr> <tr><td>19</td><td>524288</td></tr> </tbody> </table>	PUMP #	Weight	0	1	1	2	2	4	3	8	4	16	5	32	6	64	7	128	8	256	9	512	10	1024	11	2048	12	4096	13	8192	14	16384	15	32768	16	65536	17	131072	18	262144	19	524288
PUMP #	Weight																																											
0	1																																											
1	2																																											
2	4																																											
3	8																																											
4	16																																											
5	32																																											
6	64																																											
7	128																																											
8	256																																											
9	512																																											
10	1024																																											
11	2048																																											
12	4096																																											
13	8192																																											
14	16384																																											
15	32768																																											
16	65536																																											
17	131072																																											
18	262144																																											
19	524288																																											

**Table B-2: Network Terminal RS-232 Commands (Continued)**

Command	Parameter	Description
B (continued)	None	<p>For example, a code of 0 indicates no pumps responding. A code of 12 indicates pump 2 and pump 3 are responding.</p> <p>This notation is a compressed form of set notation. The member positions for the set are the bit positions 0 through 19. If a set has a member, the bit is true (1). If a set does not have a member, the bit is false (0). In this way, simple boolean bitwise operations (such as those available in the C language) can perform the operations of union, intersection, etc. for set membership. A number representing the set of pumps which require cooperation is the union of the five groups (A through E in Display menu) sets. This can be generated by bitwise <i>oring</i> the individual sets. The NULL set or empty set is the number 0. All of the other pump groupings or set membership functions use this notation to describe the contents of a set when read back or set.</p>
C	[1 - 5]	<p>Returns a numeric code that identifies which pump modules are in the selected rough valve map. The parameter 1 through 5 selects the maps 'A' through 'E' which can be reviewed and programmed through the keypad terminal when the 99 select code is entered from the Service menu. The bit weights for the set notation are the same as for the B command above.</p>
D	[1 - 5] [0-1048575]	<p>Accepts a numeric code that identifies which pump modules are mapped in the selected rough valve map. The parameter 1 through 5 selects the groups 'A' through 'E' which can be reviewed and programmed through the keypad of the Network Terminal when the 99 select code is entered from the Service menu. The bit weights for the set notation are the same as for the B command above. In this way through valve map can be remotely programmed. A logical limitation is imposed such that a cooperation set must have at least two members, and the members so defined must not be present in any of the other four (non-selected) set maps. To move a pump from one grouping to another it must first be removed from the old map before being set into a new map.</p>

**Table B-2: Network Terminal RS-232 Commands (Continued)**

Command	Parameter	Description												
E	None	Returns a numeric code that identifies which pump modules are assigned to one of the five cooperative sets. This membership is logically based on the programming of the five sets, and does not rely on whether the pumps are currently communicating or not. Pump modules not in this set are not required to cooperate when accessing a rough valve during automatic REGENs.												
F	None	Returns a numeric code that identifies which pump modules which have a need to cooperate for rough valve (which means they are in the set data returned by the E command above) have been granted the exclusive use of the rough valve for their set. Membership in this set indicates an active REGEN in process for the corresponding member pump. Other pumps which belong to the same map sets ('A' - 'E') as those currently granted rough usage will be held off from REGEN usage of the rough valve until relinquished.												
G	?   0 - 32767	Command to set or query the Multiplexor Network password value. If a ? is the argument, then the current password value is returned. This value is used to open up menu access to the remote pumps using one common password. If a number 0 - 32767 is the argument, then this value becomes the new password value, with a value of 0 being no password.												
L	None Returns Set Code 0 - 31	<p>Query which of map sets A - E are locked out by external intelligence. Power up defaults to none. M command may acquire or grab sets which are not already in cooperative use. N command is used to free or release remote sets. They are also automatically released if the Network Terminal is not given L query at least each 5 seconds when supervision active. O command sets/clears/queries supervisor mode. Returned value is sum of remote locked set's identification weights.</p> <table style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>SET ID #</th> <th>Weight</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>1</td> </tr> <tr> <td>B</td> <td>2</td> </tr> <tr> <td>C</td> <td>4</td> </tr> <tr> <td>D</td> <td>8</td> </tr> <tr> <td>E</td> <td>16</td> </tr> </tbody> </table>	SET ID #	Weight	A	1	B	2	C	4	D	8	E	16
SET ID #	Weight													
A	1													
B	2													
C	4													
D	8													
E	16													

**Table B-2: Network Terminal RS-232 Commands (Continued)**

Command	Parameter	Description
M	Set Code 0 - 31 Returns Set Code 0 - 31	Command to acquire sets which are not already in cooperative use. Zero or more sets can be identified to be disabled from the rough grant cycle in the Network Terminal. Those sets so identified and not already in use are added to the set or remote lock out sets and returned in the value which is the now current remote lock out set code as would be returned in the L command.
N	Set Code 0 - 31	Command to free or release remote sets. They are also automatically released if the Network Terminal is not given L query at least each 5 seconds when supervision active. Sets which are desired to be freed are entered as elements of a set code. They are then released. No error is caused by releasing sets not currently held.
O	?   = [0 - 1]	Command which sets/clears/queries supervisor mode. When set (=1), a periodic L command to poll the state of the remote lock out rough sets is required to maintain these sets locked out. If 5 seconds elapses with no such poll, then the sets are released to the Network Interface Terminal operation. Supervisor action may be released (the default) by using a =0 argument. A ? argument allows the current state to be examined.
P	None	Returns a numeric code that identifies which pump modules are assigned as a group for multi-REGEN start/stops. This matches the grouping defined using the multi-regeneration path (ID #99) of the regeneration menus. The returned code has the same meaning as in the B command.
Q	[0 - 1048575]	Accepts a numeric code that identifies which pump modules are to be grouped together for common regeneration start/stops from the display regeneration MULTI menu. The entered code has the same meaning as in the B command above.
V	?   = [0 - 1]	Query set or clear the CMOS GrpRgnLock flag used to control access to display Multi REGEN request.

**Table B-2: Network Terminal RS-232 Commands (Continued)**

Command	Parameter	Description
W	[1-5] [0 - 1048575]	Accepts a numeric code that identifies which pump modules are grouped in the selected gang start pump grouping. The parameter 1 through 5 selects the groups '1' through '5' which can be reviewed and programmed through the keypad of the Network Terminal when the 99 select code is entered from the REGEN menu. The bit weights for the set notation are the same as for the B command. In this way, the group start can be remotely programmed. Pumps in any such group will be commanded to start either a Full regeneration or a FastRegen (if FastRegen is available) by a manual keypad REGEN start or remote computer interface command to start. If a FastRegen group start is requested, it will be abandoned if any of the pumps included in the group are not capable of performing a FastRegen.
X	[1 - 5]	Returns a numeric code that identifies which pump modules are grouped in the selected gang start grouping. The parameter 1 through 5 selects the groups '1' through '5' which can be reviewed and programmed through the keypad of the Network Terminal when the 99 select code is entered from the REGEN menu. The bit weights for the set notation are the same as for the B command above. Any pump can be present in any one of the groups 1-5.
Y	[1 - 5] [0,2,3]	Requests to abort (0) / start Full (2) / or start Fast (3) the specified group 1 - 5. All pumps which are in the grouping will be commanded to start or stop the regeneration according to the 0/2/3 parameter. The parameter 1 through 5 selects the groups '1' through '5' which can be reviewed and programmed through the keypad of the Network Terminal when the 99 select code is entered from the REGEN menu. The REGEN stop selection code of 0 will cause a stopREGEN command to be sent to all of the pumps in the selected gang-group. A REGEN start command (2 or 3) will cause all of the pumps which are numbers of the selected group to receive a REGEN start command, and if a Fast command is selected (3), then the entire group start will be abandoned if any of the pumps responding in the set are not a G version series pump (with a return of a G or H error code) and, or any of the pumps are currently in regeneration.

**Table B-2: Network Terminal RS-232 Commands (Continued)**

Command	Parameter	Description								
g	[0 - 1]?	<p>Command to disable competing RS-232 ports (1) or allow competing RS-232 ports (0, the default). When a serial port receives the g1 command, the remaining ports will be inhibited from future access to the Network Terminal or the pumps and will reply with either the I or J reply, indicating they are inhibited from responding. Querying the command will result in a return of 0 for no lockout present, and a code of 1, 2, or 3 for a lockout and indication of which port has ownership.</p> <table style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Select #</th> <th>Owning Port</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Host RS-232 port</td> </tr> <tr> <td>2</td> <td>Service RS-232 port</td> </tr> <tr> <td>3</td> <td>Auxiliary RS-232 port</td> </tr> </tbody> </table>	Select #	Owning Port	1	Host RS-232 port	2	Service RS-232 port	3	Auxiliary RS-232 port
Select #	Owning Port									
1	Host RS-232 port									
2	Service RS-232 port									
3	Auxiliary RS-232 port									
n	?   = [0 - 1]	<p>Command to query, turn ON or turn OFF the full rough coordination feature. When ON, all pumps sharing a common manifold will rough out to base pressure at the same time assuming they were set into regeneration through the group REGEN function (REGEN 99).</p> <p><i>NOTE: This feature exists only in some custom Network Terminals.</i></p>								
o	?   = [0-1]	<p>Command to query, turn ON or turn OFF the Power Fail Coordination Feature. Upon recovery from a power failure, all cryopumps sharing a common manifold will rough out to base pressure at the same time assuming that both Full Rough Coordination and Power Fail Coordination were turned ON.</p> <p><i>NOTE: This feature only exists in some custom Network Terminals.</i></p>								